





# OCTO TOSS GAME

905-805

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	903-805	Leg for Octo Toss	2
2	913-312	Octo Toss Wave	1
3	913-311	Octo Toss Body	1
4	116-545	5/16" x 2-1/2" Button Head Bolt SS	4
5	216-512	5/16" x 1" Button Head Nut SS	4
6	316-501	5/16" Flat Washer SS	4
7	316-601	3/8" Flat Washer SS	4
8	416-350	3/16" Socket Key	1
9	516-400	LockTite	1

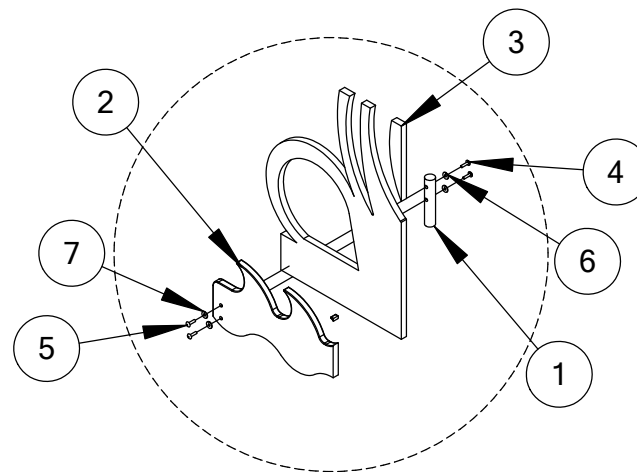

Detail A

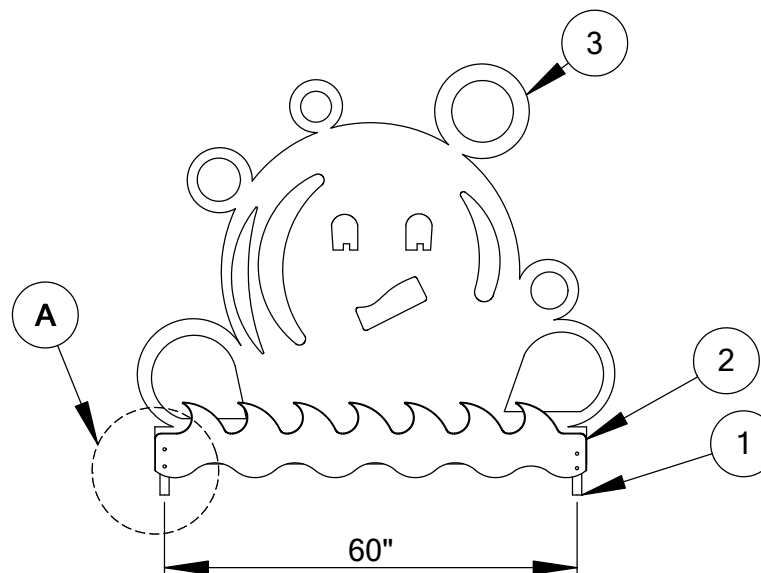



# OCTOTOSS GAME

905-805

## SPECIFICATIONS:

Panels: Made from 0.75" High-Density Polyethylene with UV Inhibitor.

Support Legs: Powder coated 1-7/8" O.D. Pipe.

Hardware: Stainless Steel.

Weight: 70 lbs.

Required Area: 1' x 7'

## INSTALLATION INSTRUCTIONS:

**IMPORTANT: Read all instructions thoroughly before beginning installation.**

1. Begin by installing the one leg to the OctoToss Body and Wave through the two pre-drilled holes in each of the panels using the 5/16" x 2-1/2" button head bolt, 5/16" x 1" button head nut, 5/16" flat washer, and 3/8" flat washer.
2. Next repeat step one for the second leg
3. Now place the Octotoss game in desired location and mark a hole at each leg. Dig the two holes approximately 18" deep with a diameter of 12". Place the Octotoss in the holes and level. Once the Octotoss is level in all directions pour the mixed concrete into the holes, leaving the concrete approximately 2" below the ground service. After the concrete has been poured be sure to re-level and brace the Octotoss so that it will not shift during the drying process. Once the concrete has cured backfill the holes with dirt.

## MAINTENANCE:

Periodically check all hardware for tightness, and tighten if necessary. If any parts are found to be faulty immediately discontinue use until the part/parts have been repaired or replaced. Check for any gouges, breaks, or cracks on plastic.